

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Veröffentlichungsnummer:
(11) Publication number:
(11) Numéro de publication:

0 975 377

Internationale Anmeldung veröffentlicht durch die
Weltorganisation für geistiges Eigentum unter der Nummer:

WO 98/47545 (art.158 des EPÜ).

International application published by the World
Intellectual Property Organisation under number:

WO 98/47545 (art.158 of the EPC).

Demande internationale publiée par l'Organisation
Mondiale de la Propriété sous le numéro:

WO 98/47545 (art.158 de la CBE).

THIS PAGE BLANK (USPTO)




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61L 9/00		A2	(11) International Publication Number: WO 98/47545
			(43) International Publication Date: 29 October 1998 (29.10.98)
(21) International Application Number: PCT/CA98/00369 (22) International Filing Date: 17 April 1998 (17.04.98) (30) Priority Data: 08/841,900 17 April 1997 (17.04.97) US (71) Applicant: ENGINEERING DYNAMICS LTD. [CA/CA]; R.R. #1, 137 Young Drive, Carleton Place, Ontario K7C 3P1 (CA). (72) Inventor: SUMMERS, George, Robert; P.O. Box 1174, Station Main, Carleton Place, Ontario K7C 4L1 (CA). (74) Agents: WOOD, Max, R. et al.; Swabey Ogilvy Renault, Suite 1600, 1981 McGill College Avenue, Montreal, Quebec H3A 2Y3 (CA).			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: PORTABLE GERMICIDAL AIR FILTER

(57) Abstract

A lightweight portable germicidal air filter (10) for home and personal use is described. The air filter (10) includes a cabinet (12) which houses an electrostatic air filter (28), an ultraviolet lamp (26) and a parabolic reflector (36), or a convex lens (54) for focusing the ultraviolet radiation emitted by the lamp on an upstream side of the air filter. The reflector or the lens are constantly oscillated to systematically sweep the upstream side of the filter with germicidal levels of radiation. A fan (30, 32) located adjacent the downstream side of the filter draws air through the filter and impels it out through areas for air exhaust (20) in the side walls (16) of the cabinet. The advantage is a simple, lightweight germicidal air filter with few moving parts which is inexpensive to manufacture.

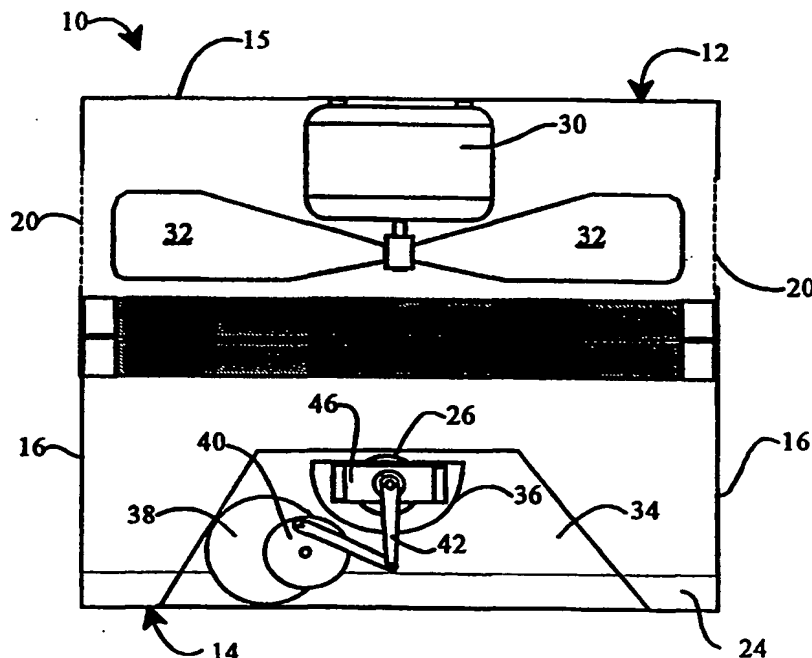

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PORTABLE GERMICIDAL AIR FILTER**TECHNICAL FIELD**

5 The present invention relates to the removal of
suspended particulate matter from air and, in particular
to the removal of particulate matter from air by
filtration and the destruction of microorganisms in the
particulate matter removed.

10

BACKGROUND OF THE INVENTION

 The airborne transmission of disease organisms,
especially respiratory disease organisms, has long been
recognized as a serious problem. Health care authorities
15 and aerobiologists have now become acutely aware of the
problem due to the evolution of antibiotic resistant
strains of streptococcus and tuberculosis, for example.
Although, the airborne transmission of disease is not
well understood, it is abundantly clear that many
20 diseases caused by both bacteria and viruses are
primarily transmitted from host to host by air currents.
It is also known that certain infectious agents such as
tuberculosis bacteria can survive many hours suspended in
air. Quarantining individuals infected with resistant
25 strains of tuberculosis is therefore at best only a
partial solution, since the air they pollute must
eventually circulate into space occupied by uninfected
individuals unless the air is treated to remove and
destroy the resistant bacteria. To this end, germicidal
30 air filters have been invented. Examples of such filters
are described in United States Patent 5,330,722 which
issued on July 19, 1994 to W.E. Pick and has subsequently

been assigned to the applicant. While the germicidal air filtration systems described in that patent have proven to be very effective in removing microorganisms from the air and destroying them, the air filtration systems
5 described are principally adapted to permanent or semi-permanent installations and are not primarily adapted to lightweight portable filters intended for home and/or personal use.

Another recently recognized hazard of modern
10 living is the dust mite. Modern dwellings with the air-tight closures, central heating and cooling systems, abundant carpeting and minimal through flow of outside air provide ideal breeding grounds for dust mites. These mites are nearly microscopic and readily become airborne.
15 Airborne mites are of course inhaled, which can cause strong allergic reactions in some individuals and contributes to the discomfort of all. With proper filtration equipment, especially in sleeping areas, dust mites can be removed from the air and destroyed, thus
20 limiting exposure to airborne mites, curbing population growth and controlling infestations. A germicidal air filter unit in a sleeping area can contribute to the control of dust mites.

It is therefore an object of the invention to
25 provide a lightweight germicidal air filter which is portable and adapted for home and/or personal use.

It is a further object of the invention to provide a germicidal air filter which requires a minimum number of moving parts.

30 It is yet a further object of the invention to provide a lightweight germicidal air filter which is simple to construct and inexpensive to manufacture.

SUMMARY OF THE INVENTION

These and other objects of the invention are realized in a germicidal air filter (10) comprising a filter medium (28) for removing particulate matter including at least a portion of microorganisms from an air stream to be filtered, the filter medium having an upstream side exposed to the air to be filtered, at least one ultraviolet radiation source (26) located in proximity of the upstream side of the filter medium for exposing at least a portion of the upstream side of the filter medium to ultraviolet radiation, a one of the filter medium and the ultraviolet radiation source being displaceable with respect to the other in order to systematically expose the upstream side of the filter medium to germicidal levels of ultraviolet radiation, characterized in that:

the filter medium (28) and the ultraviolet radiation source (26) are stationarily mounted in proximity, and a means for focusing (36, 54) ultraviolet radiation emitted by the ultraviolet radiation source is oscillated about the ultraviolet radiation source so that the radiation is focused onto a predefined area of the filter medium and substantially all of the upstream side of the filter medium is systematically irradiated.

The germicidal air filter in accordance with the invention preferably comprises a cabinet having an air intake area and an air discharge area with a filter medium disposed between the air discharge area so that substantially all air drawn through the cabinet passes through the filter medium. The filter medium is preferably a planar filter and most preferably an electrostatically enhanced planar filter of a type

described, for instance, in United States Patents 4,978,372 and 4,886,526 which issued on December 18 1990 and December 12, 1989, respectively. Air is preferably moved through the cabinet by a fan located adjacent the downstream side of the filter medium. An ultraviolet radiation source is located adjacent an upstream side of the filter medium. The ultraviolet radiation source is preferably an ultraviolet lamp that is stationarily mounted in proximity to the upstream side of the filter medium. In order to ensure that substantially the entire surface of the filter medium is exposed to levels of radiation which are lethal to known microorganisms, it is preferable that a means for focusing the radiation emitted by the ultraviolet source be provided so that the radiation is focused onto a predefined area of the filter surface, and that the means for focusing the ultraviolet radiation be oscillated about the ultraviolet source so that substantially all of the filter surface is systematically irradiated with an intensity level of radiation which is lethal to known microorganisms.

The focusing of the ultraviolet radiation may be accomplished by a parabolic reflector positioned behind the bulb or a reflector in combination with an elongated lens positioned in front of the bulb so that substantially all of the ultraviolet radiation emitted by the ultraviolet source is focused in a relatively narrow, elongated band on the upstream side of the filter surface. The means for focusing the radiation, e.g. a reflector or the elongated lens, are oscillated about an axis parallel to the axis of the radiation source by an electric motor, for example, which drives a cam shaft assembly at a predefined rate to effect the desired

irradiation of the upstream side of the filter medium. It has been found that the motor preferably rotates the cam shaft assembly at about 2 rpm, which yields a sweep of the filter surface each 30 seconds, although other
5 rates of oscillation may prove equally effective. Since the germicidal air filter in accordance with the invention includes very few components and the components are light in weight, it is possible to provide a germicidal air filter which is easily handled and may be
10 used in home and/or personal applications such as in the workplace.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be further explained by
15 way of example only and with reference to the following drawings wherein:

Fig. 1 is a perspective view of an exterior of the cabinet for a portable germicidal air filter in accordance with the invention;

20 Fig. 2 is a perspective view of the cabinet shown in Fig. 1 with a service door open at the front of the unit showing the preferred position of the ultraviolet source and the filter medium;

Fig. 3 is a top plan view taken along lines 3-3
25 of the portable germicidal air filter shown in Fig. 1;

Fig. 4 is a schematic elevational view of the mechanism for oscillating a parabolic reflector or a lens for focusing the ultraviolet radiation emitted by an ultraviolet radiation source in the portable germicidal
30 air filter shown in Fig. 1;

Fig. 5a through 5c are cross-sectional views taken along lines 5-5 of the portable germicidal air

filter shown in Fig. 1, to illustrate the way in which ultraviolet radiation is focused on an upstream side of the filter medium in the portable germicidal air filter;

5 Fig. 6, which appears on sheet two of the drawings, shows an alternate arrangement for focusing the ultraviolet radiation in which a lens and reflector combination focus the radiation on the filter medium; and

10 Fig. 7 is a wiring diagram suitable for a portable germicidal air filter in accordance with the invention.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 shows a perspective view of an exterior of a portable germicidal air filter generally indicated
15 by the reference 10. The germicidal air filter 10 includes a cabinet 12 having a front wall 14 and opposed side walls 16. The front wall 14 includes an area for air intake 18 which may be louvred (as illustrated) or covered with a coarse open-celled plastic foam (not
20 illustrated), or the like. The area for air intake permits air to be filtered to be drawn into the cabinet. The side walls 16 respectively include areas for air exhaust 20 which are preferably covered by a grid but may also be covered by louvres or the like. A top of the
25 front wall 14 also includes a control panel 22 which will be explained in more detail with reference to Fig. 7.

Fig. 2 shows the germicidal air filter 10 with a service door 24 in an open condition. The service door forms a substantial part of the front wall 14 and is
30 hinged to a side wall 16 so that it is conveniently opened to service the interior of the filter. Mounted to a center of the service door 24 is an ultraviolet source

26, preferably an ultraviolet lamp. The ultraviolet lamp 26 may be an ozone generating lamp to facilitate and enhance the germicidal effect of the filter. Details of the mechanism for mounting the ultraviolet lamp 26 and focusing the ultraviolet radiation which it emits will be explained below with reference to Figs. 3-6. Positioned between the service door 24 and the areas for air exhaust 20 is an air filter 28, the construction and operation of which is also explained below in more detail. An electrical power cable 25 supplies operating current to the ultraviolet lamp 26 and to an electric motor 38 (see Fig. 3) from an appropriate ballast and transformer (see Fig. 7) which are housed in a compartment (not illustrated) in the top of the cabinet 12.

Fig. 3 is a cross-sectional view of the cabinet 12 taken along lines 3-3 of Fig. 1. As is apparent, a fan consisting of fan motor 30 and fan blades 32 is mounted to a rear wall 15 of the cabinet 12. The fan blades 32 are set at a pitch, preferably 30° - 40° , to draw air through the area for air intake in the front wall 14 of the cabinet 12 and expel the air through the areas for air exhaust 20 in the side walls 16 of the cabinet 12. The pitch of the fan blades is preferably in the range of 30° - 40° because this pitch is most effective for moving air through the cabinet with least noise generation. At this pitch the fan blades impel air laterally through the areas for air exhaust 20 and the resulting vacuum draws air through the air intake 18. The air is thereby drawn through the air filter 28 which is preferably an electrostatic air filter of the charged media type well known in the art and described, for

example, in United States Patent 4,886,526 which issued December 12, 1989. The air filter 28 is serviced by removing the filter from the cabinet 12 through the service door 24. After the air filter is removed from
5 the cabinet 12, service is accomplished in a manner well known in the art and described for example in United States Patent 4,886,526.

The only enhancements to the filter 28 described in that patent are several modifications to
10 ensure that ultraviolet radiation is not reflected back out of the filter cabinet through the area for air intake 18 (see Fig. 1). To reduce reflection, the aluminum filter frame is painted matte black, as is the outer screen on the upstream side of the filter 28. In
15 addition, the fibrous filter medium is preferably made from a glass fibre pad coloured black by the addition of carbon black to the glass mixture. Other colorants have proven to be unstable and transient when exposed to the ultraviolet radiation. The interior of the cabinet 12
20 between the service door 24 and the filter 28 (see Fig. 2) are likewise preferably painted matte black to reduce reflection.

A pair of support brackets 34 mount the ultraviolet lamp 26 to a center of the service door 24.
25 Only the bottom bracket 34 is illustrated in Fig. 3 for clarity. When the service door 24 is in a closed condition, the distance from the ultraviolet lamp 26 to the upstream side of the filter 28 is preferably about 2.65" (6.73 cm). The upstream side of the filter medium
30 is preferably about 10" (25.4 cm) wide and the cabinet is about 12" (30.48 cm) wide. Given those dimensions, the distance from the ultraviolet lamp 26 to either outer

edge of the upstream side of the filter 28 is about 5.88" (14.94 cm). A single ultraviolet lamp 26 is not adequate to irradiate the entire surface of the filter to germicidal levels. In order to conserve weight, manufacturing and maintenance expense, however, and ensure that unacceptable levels of radiation do not escape from the cabinet 12, it is preferable that the unit include only one ultraviolet lamp 26. A mechanism for focusing the radiation from the lamp onto a predefined area of the upstream side of the filter 28 is therefore desirable. The preferred mechanism for focusing the ultraviolet radiation is a parabolic reflector 36 which is oscillated about the lamp 26 to systematically sweep the focused radiation across the upstream side of the filter 28. Oscillation of the parabolic reflector is preferably accomplished by a 24 volt twin coil gear reduction motor 38 well known in the art which drives a fly wheel 40. The fly wheel 40 in turn moves a cam shaft assembly 42 having a first arm connected to the fly wheel 40 and a second arm connected to a shaft which supports the parabolic reflector 36 as will be explained in more detail with reference to Fig. 4.

Fig. 4 shows an elevational view of the preferred mechanism for oscillating the parabolic reflector 36. The ultraviolet lamp 26 is preferably stationary and connected to lamp sockets 44. Each lamp socket 44 is supported by a U-shaped bracket 46 which is affixed to the respective support brackets 34 that are mounted to a center of the inner side of the service door 24. Mounted under each U-shaped bracket 46 is a bearing 48 that accepts a stub shaft 49 which supports a

reflector support bracket 50 attached to opposite ends of the parabolic reflector 36. At a top end of the reflector 36, a stub shaft 49 interconnects the reflector support bracket 50 with the cam shaft assembly 42 which
5 is in turn connected to the fly wheel 40 of the gear reduction motor 38. As the gear reduction motor operates it rotates the fly wheel 40 preferably at about 2 revolutions per minute. The rotation of the fly wheel causes the cam shaft assembly 42 to oscillate the
10 parabolic reflector 36 which sweeps focused radiation across the upstream side of the filter 28 as can be seen in Figs. 5a-c.

Figs. 5a-c are cross-sectional views taken along lines 5-5 of Fig. 1. The parabolic reflector is
15 preferably made from sheet metal of an aluminum alloy having a bright polished side to enhance reflection. Such sheet metal is available, for example, from Ideal Metal in Toronto, Canada and is identified as Aluminum Bright (1100-H24). The sheet metal is typically rolled
20 into the desired shape using techniques well known in the art. The focal length of the parabolic reflector 36 is preferably such that the radiation emitted by the ultraviolet lamp 26 is most concentrated when the radiation is focused at the edges of the upstream side of
25 the air filter 28 so that the germicidal effect on the upstream side of the air filter is as consistent as possible. In the preferred embodiment shown in Figs. 5a-5c, the focal length of the parabolic reflector 36 is therefore preferably about 5.88"
30 (14.94 cm). As the parabolic reflector 36 is oscillated so that the beam sweeps toward the center of the filter (see Fig. 5b) it is apparent that the radiation is less

focused on the upstream side of the filter medium 28, but since the strength of the radiation is inversely proportional to the distance from the source, the same germicidal effect is achieved over a greater area. Thus
5 as the oscillation completes a sweep as shown in Fig. 5c, the radiation becomes more focused as the distance from the ultraviolet lamp increases, until the focus is most intense at the outer edge of the upstream face of the filter medium. It will be understood by those skilled in
10 the art that the oscillation of the parabolic reflector 36 also has the beneficial effect of constantly changing the angle of incidence of the ultraviolet radiation on the upstream side of the air filter 28. This promotes deeper penetration of the radiation into the air
15 filter medium and tends to eliminate shaded areas where bacteria, viruses or other airborne microorganisms may survive.

Fig. 6 shows an alternate arrangement for focusing the ultraviolet radiation emitted by the ultraviolet
20 lamp 26. In this embodiment, a reflector 52, which is not a focused parabolic reflector, reflects ultraviolet radiation onto a convex lens 54 which focuses the ultraviolet radiation in much the same way as the parabolic reflector 36. The lens 54 is preferably a
25 plastic lens made from, for example, acrylate (ROP-4) plastic available from Cyro Industries of Mount Arlington, New Jersey, U.S.A. Plastic is preferred for the lens 54 because it is light in weight and shatterproof. The acrylate plastic is preferred because
30 it is resistant to the effects of the ultraviolet radiation and most of the ultraviolet radiation passes through it. The lens 54 is preferably designed to have a

focal length such that the radiation emitted by the ultraviolet lamp 26 is most concentrated when the radiation is focused at the edges of the upstream side of the air filter 28. In the preferred embodiment shown in Figs. 5a-5c, the focal length of the lens 54 is therefore preferably about 5.88" (14.94 cm). While it is obvious that the lens 54 protects the ultraviolet lamp 26 from exposure to dust particles suspended in the air to be filtered, it should be noted that the shape of the parabolic reflector 36 also protects the ultraviolet lamp 26 from exposure to dust particles suspended in the air to be filtered. As air is drawn around the reflector 34, the shape of the reflector creates a substantially static vacuum around the ultraviolet lamp 26, which inhibits dust particles suspended in the air to be filtered from coming into contact with the ultraviolet lamp and therefore tends to keep the lamp clean.

Fig. 7 is a wiring diagram suitable for wiring the germicidal air filter 10 in accordance with the invention. A three prong power plug 54 is connected to a line cord 56 which typically supplies 120 VAC input current. A ground conductor of the line cord 56 is connected to ground 58 and a power conductor 55 of the line cord 56 is interrupted by a fuse 60 to protect the circuit from overload. An interlock switch 62 which is operatively associated with the service door 24 interrupts the power conductor 55 of the line cord 56 so that the unit is shut down whenever the service door 24 (see Fig. 2) is open in order to protect persons in the vicinity from exposure to ultraviolet radiation. A conductor 63 connects the power conductor 55 of line

cord 56 to a dual speed fan motor switch 64 which is mounted to the control panel 22 (see Fig. 1). The dual speed fan motor switch 64 controls the operation of the fan motor 30 and supplies current to the high voltage electronics 66 which power the electrostatic air filter of the charged media type 28 in a manner well known in the art. Each pole of the dual speed fan switch 64 is connected to a conductor 65 for supplying current to a transformer 68. The return conductor of transformer 68 is connected to the return conductor 57 of the line cord 56 by a conductor 67. The high voltage electronics 66 require AC current which is output by the transformer 68. The power conductor 55 of the line cord 56 is likewise connected to a lamp and oscillating motor switch 70 which permits the ultraviolet radiation of the filter medium to be independently controlled from the operation of the fan and the electrostatic filter, if desired. The switch 70 is optional but is preferred so that the ultraviolet unit can be controlled without opening the service door 24 or disconnecting the line cord 56. Independent operation of the fan/filter and the ultraviolet lamp oscillator also permits the irradiation of the filter medium 28 to continue for a minute or two after the fan is shutdown, to ensure that any live microorganisms on the filter medium 28 are destroyed before the filter is serviced. This feature is important if the filter is used in an environment where antibiotic resistant microorganisms are known to be present.

A ballast 74 is connected to the lamp and oscillating motor switch 70 by a conductor 72, which is likewise connected by a conductor 73 to the return conductor 57 of the line cord 56. The ballast 74

transforms the 120 volt AC input to a voltage suitable for driving the ultraviolet lamp 26. Also connected to the lamp and oscillating motor switch 70 by a conductor 75 is a transformer 76 which is also connected
5 to the return conductor 57 of the line cord 56. The transformer 76 outputs a 24 volt AC current for driving the twin coil gear reduction motor 38. The transformer 68, the ballast 74 and the transformer 76 are preferably mounted to a bottom wall of a compartment (not
10 illustrated) in cabinet 12 located above the filter 28 and behind the control panel 22 (see Fig. 2). It will be understood by those skilled in the art that this wiring diagram is exemplary only and other wiring arrangements may function equally well.

15 The efficiency of germicidal air filters has been tested in a 70 cubic foot test chamber filled with ambient air as described in United States Patent 5,330,772. In that test, a petri dish containing agar agar was exposed to the air in the test chamber to
20 collect a control sample of bacteria suspended in the air of the chamber prior to activation of a germicidal air filter installed in the test chamber. The temperature in the test chamber was 65°F and the relative humidity was 50 percent at the time of testing. After the control
25 sample was taken, the germicidal air filter was operated for a period of five minutes. The air flow through the filter was about 250 cubic feet per minute. After five minutes of operation, an identical petri dish containing agar agar was exposed to the air in the chamber using the
30 same procedure used for the control sample, and both petri dishes were incubated to determine the bacteria containing particle counts before and after filtration.

In the control sample about 65 bacteria-containing particles were collected. In the test sample taken after five minutes of operation, no bacteria-containing particles were collected. Insofar as the culture method was capable of testing for the presence of airborne bacteria, the test chamber was completely rid of such bacteria. It is therefore apparent that germicidal air filters are very effective in removing and destroying at least a portion of microorganisms suspended in air.

10

INDUSTRIAL APPLICABILITY

A simple, lightweight germicidal air filter suitable for home and/or personal use is provided. The filter removes at least a portion of the microorganisms suspended in the air filtered and destroys those microorganisms with ultraviolet radiation which is systematically focused at germicidal levels on an upstream side of the filter medium. Such air filters are known to be effective against microorganisms including bacteria, and microscopic insects such as dust mites and the like. The germicidal air filter in accordance with the invention therefore contributes to the comfort and safety of individuals, and provides a portable unit suitable for home and personal use that can be manufactured at an affordable price.

25

The construction of the preferred embodiment described above is intended to be exemplary only.

Although described with reference to portable electrostatic air filters, the invention is neither limited to portable applications, nor to electrostatically enhanced filter mediums. The invention may be adapted to permanent installations in air handling

30

systems, or large wall or ceiling hung filtration units. It may also be adapted for use with passive filter mediums.

Variations, modifications and alterations may
5 be apparent to those skilled in the art. The scope of the invention is intended to be limited only by the scope of the appended claims.

CLAIMS:

1. A germicidal air filter (10) comprising a filter medium (28) for removing particulate matter including at least a portion of microorganisms from an air stream to be filtered, the filter medium having an upstream side exposed to the air to be filtered, at least one ultraviolet radiation source (26) located in proximity of the upstream side of the filter medium for exposing at least a portion of the upstream side of the filter medium to ultraviolet radiation, a one of the filter medium and the ultraviolet radiation source being displaceable with respect to the other in order to systematically expose the upstream side of the filter medium to germicidal levels of ultraviolet radiation, c h a r a c t e r i z e d in that:

the filter medium (28) and the ultraviolet radiation source (26) are stationarily mounted in proximity, and a means for focusing (36, 54) ultraviolet radiation emitted by the ultraviolet radiation source is oscillated about the ultraviolet radiation source so that the radiation is focused onto a predefined area of the filter medium and substantially all of the upstream side of the filter medium is systematically irradiated.

2. A germicidal air filter as claimed in claim 1 wherein the means for focusing the ultraviolet radiation emitted by the ultraviolet radiation source comprises a parabolic reflector (36) which focuses the ultraviolet radiation in an elongated narrow band on the filter medium.

3. A germicidal air filter as claimed in claim 1 wherein the means for focusing the ultraviolet radiation is a reflector (52) and an elongated lens (54) which focuses the ultraviolet radiation in an elongated band on the filter medium.

4. A germicidal air filter as claimed in claims 2 or 3 wherein the means for oscillating the reflector (36, 52) is a gear reduction motor and a cam assembly for oscillating the reflector about an axis so that the upstream side of the filter medium is systematically exposed to focused ultraviolet radiation.

5. A germicidal air filter as claimed in any preceding claim wherein the filter medium is a fibrous filter medium.

6. A germicidal air filter as claimed in claim 5 wherein the fibrous filter medium is a pleated paper medium suitable for use in filtering air.

7. A germicidal air filter as claimed in claim 5 wherein the fibrous filter medium is a fiberglass medium suitable for use in filtering air.

8. A germicidal air filter as claimed in claims 5, 6 or 7 wherein the fibrous filter medium is electrostatically enhanced so that the fibers of the filter are polarized by an electrostatic field to increase the efficiency of the filter medium in capturing particulate matter suspended in air to be filtered.

9. A germicidal air filter as claimed in claim 8 wherein the fibrous filter medium is impregnated with carbon black to minimize reflection of ultraviolet radiation from the upstream side of the filter medium.

10. A germicidal air filter as claimed in any preceding claim wherein the radiation source is an ultraviolet lamp.



11. A germicidal air filter as claimed in any preceding claim wherein the filter medium (28), the ultraviolet radiation source (26) and the means for focusing (36, 54) ultraviolet radiation emitted by the ultraviolet radiation source are mounted in a cabinet (12) having at least one area for air intake (18) and at least one area for air exhaust (20).

12. A germicidal air filter as claimed in claim 11 wherein the at least one area for air intake comprises a service access door (24) having a front panel that is louvered for admitting air.

13. A germicidal air filter as claimed in claim 11 wherein the at least one area for air exhaust comprises a grid in each side wall of the cabinet.

14. A germicidal air filter as claimed in claims 11, 12 or 13 wherein the upstream side of the filter medium includes a frame that surrounds the filter medium and a charging screen that covers the fibrous filter medium attached to the frame, the frame, the charging screen and an interior of the cabinet upstream of the

filter medium being painted matte black to minimize reflection of the ultraviolet radiation.

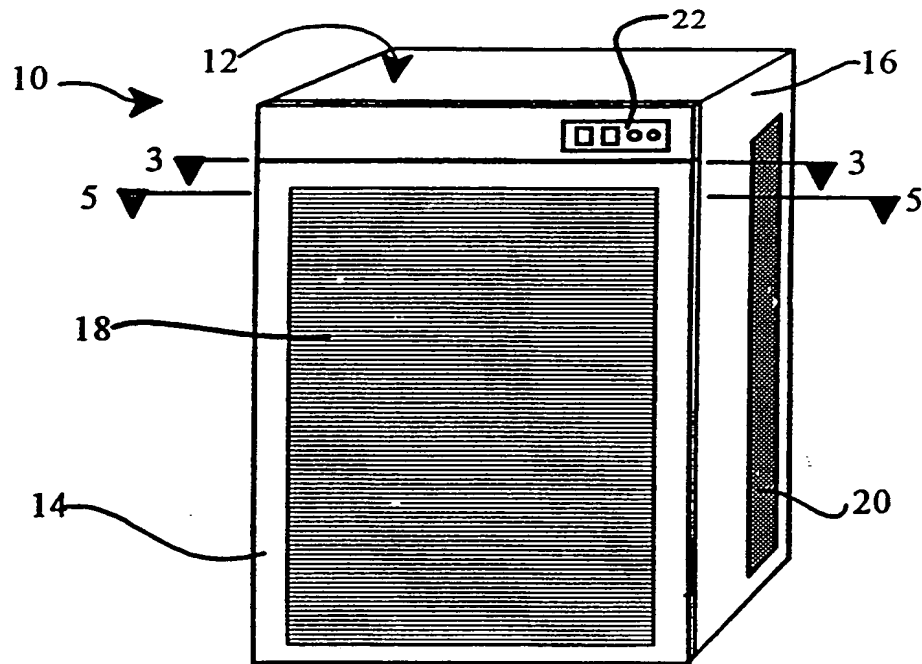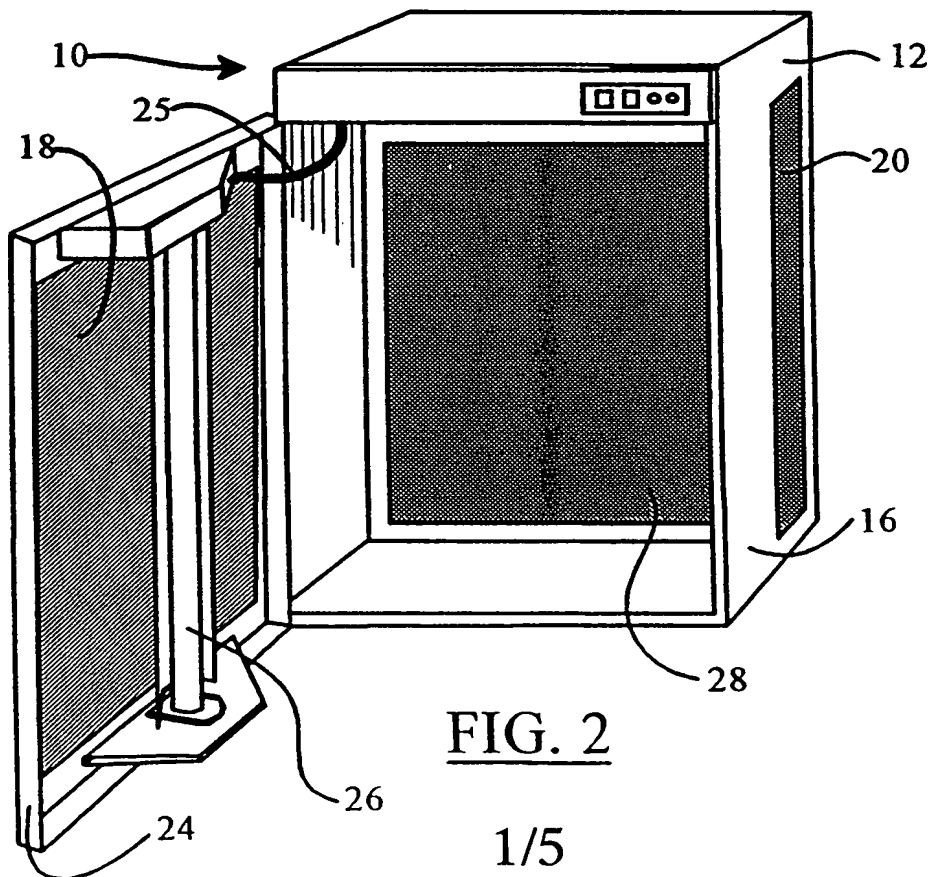FIG. 1FIG. 2

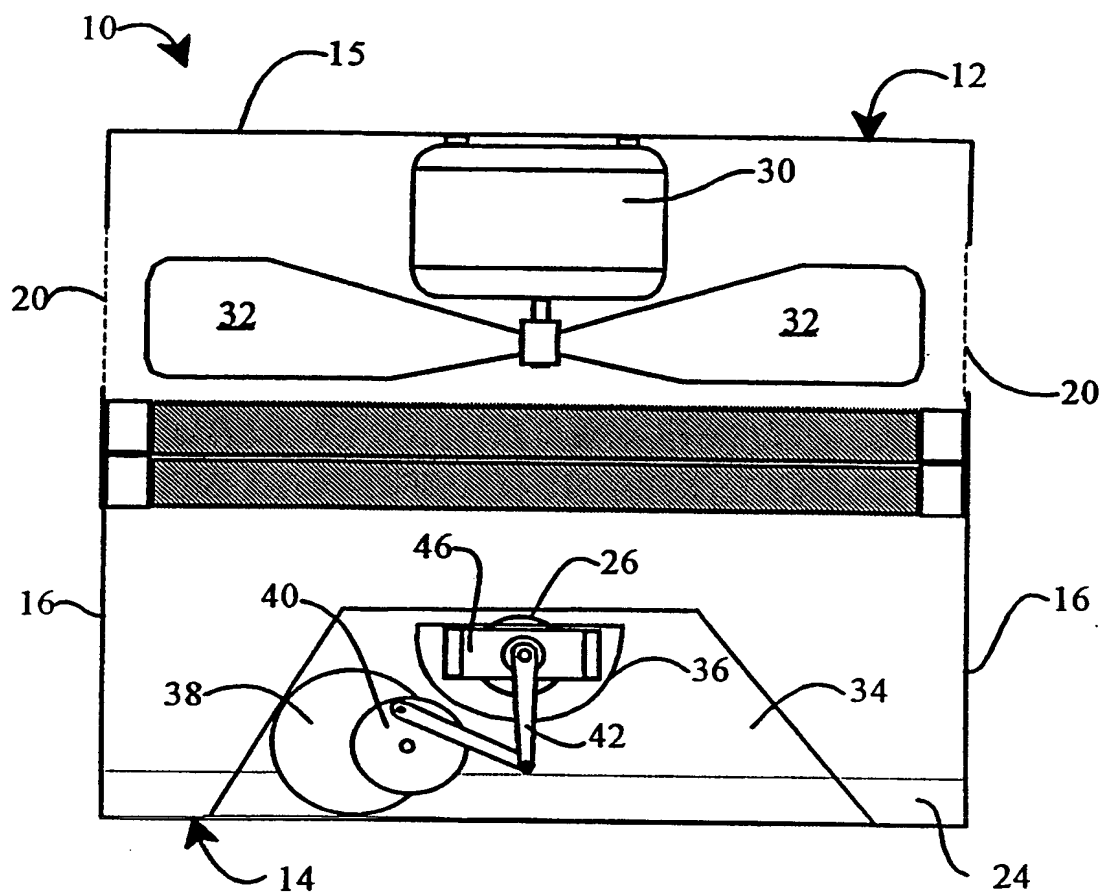


FIG. 3

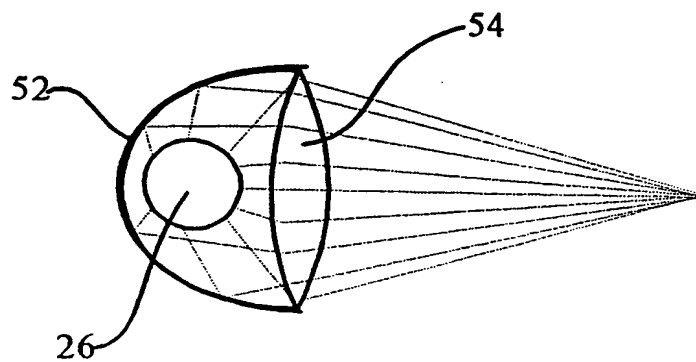


FIG. 6

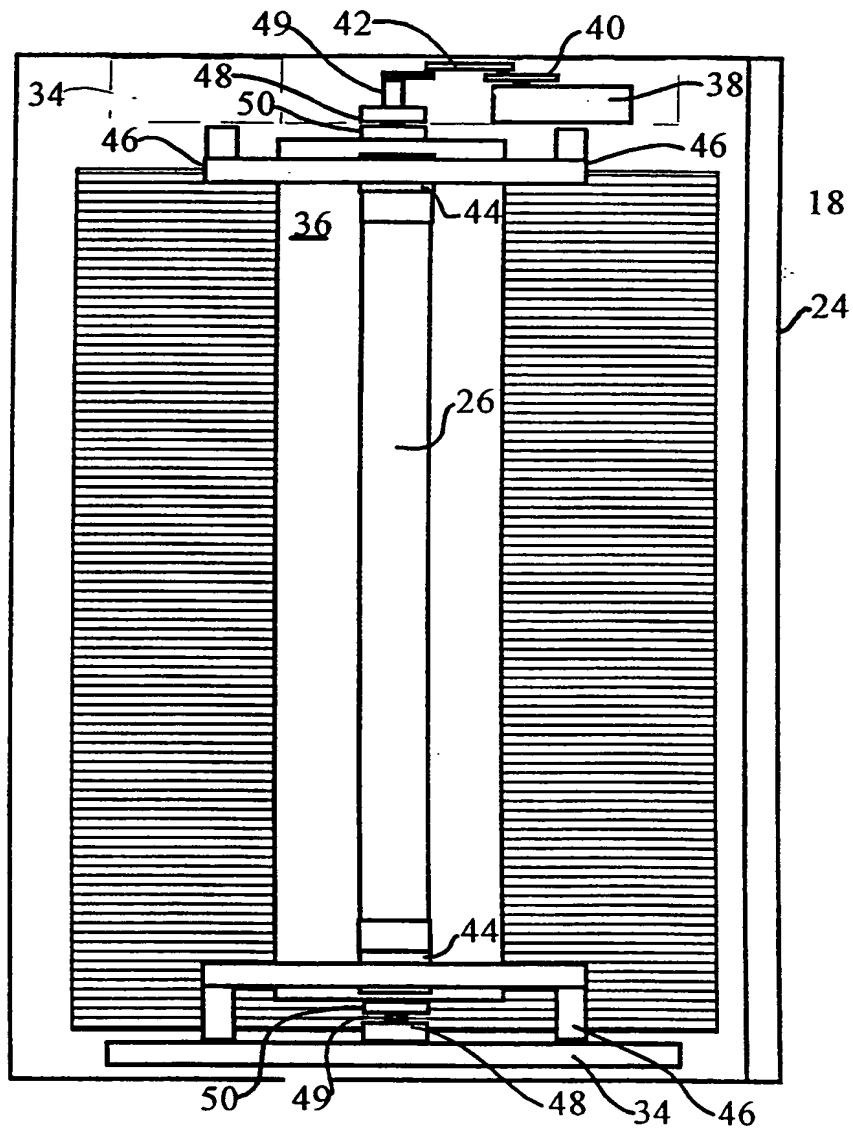


FIG. 4

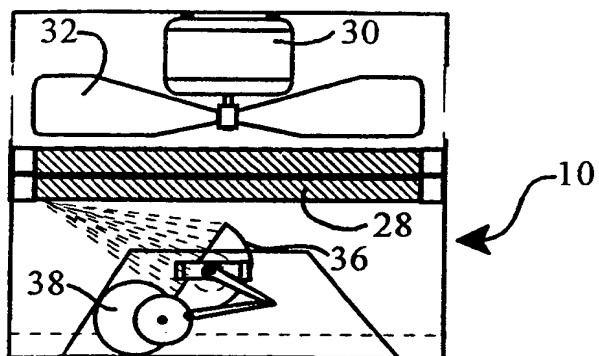


FIG. 5a

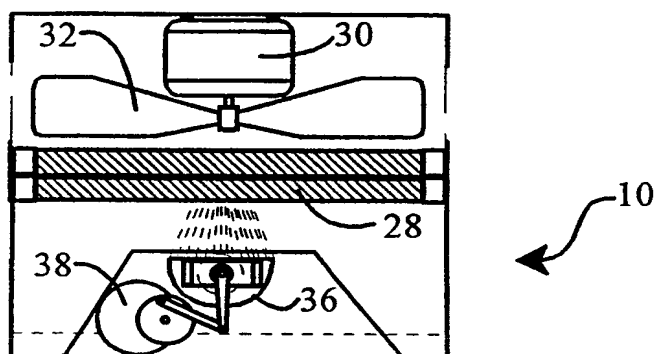


FIG. 5b

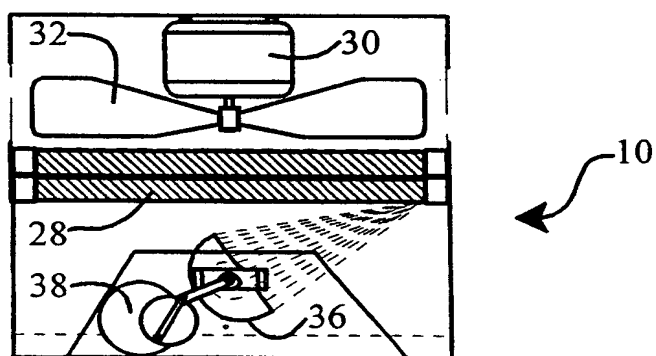


FIG. 5c

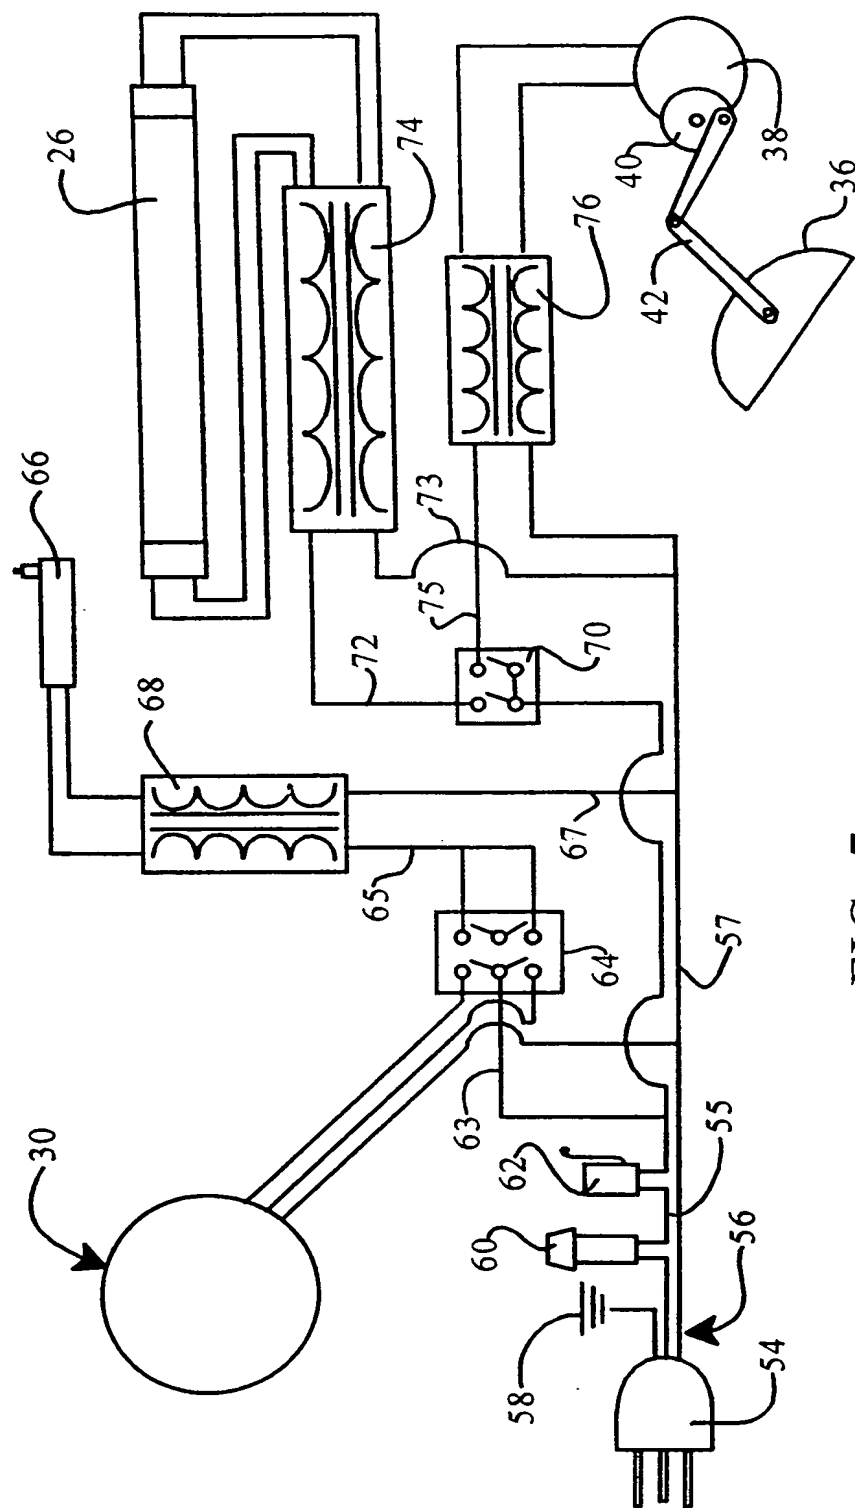
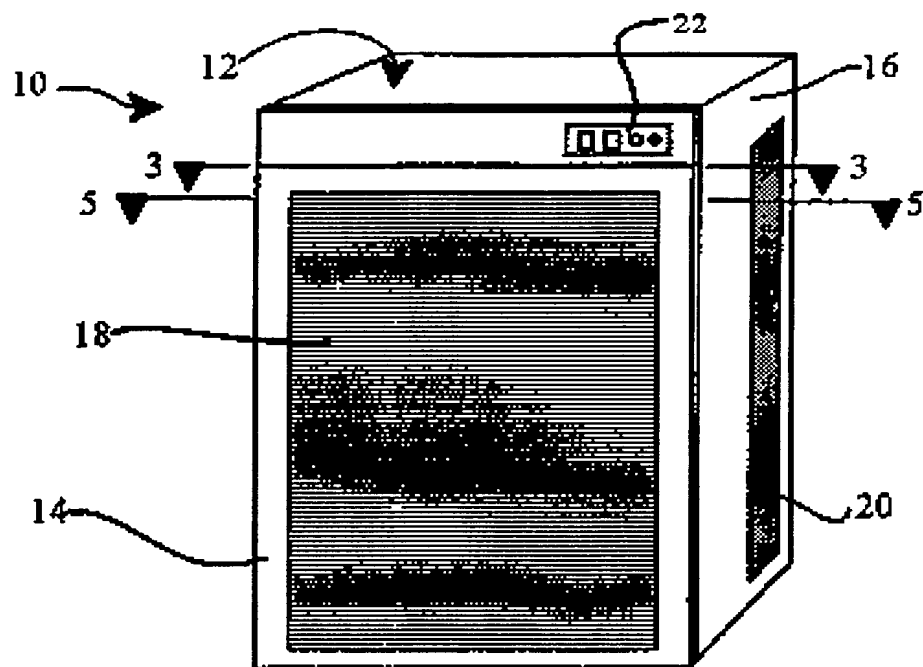
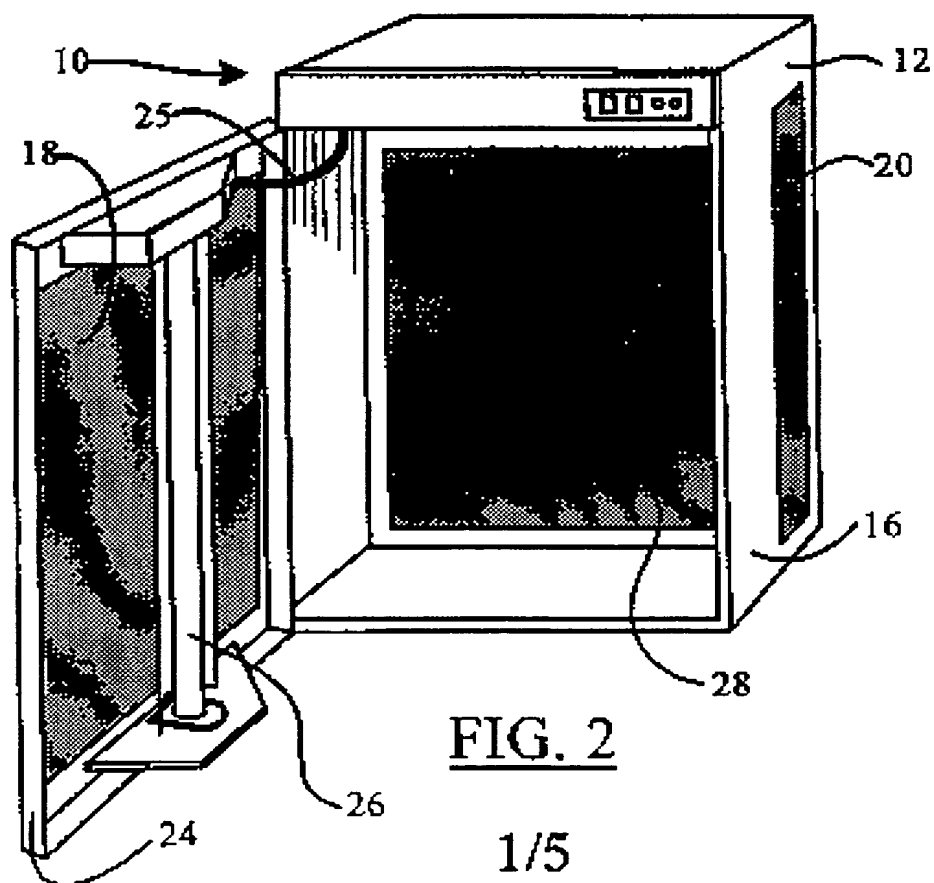
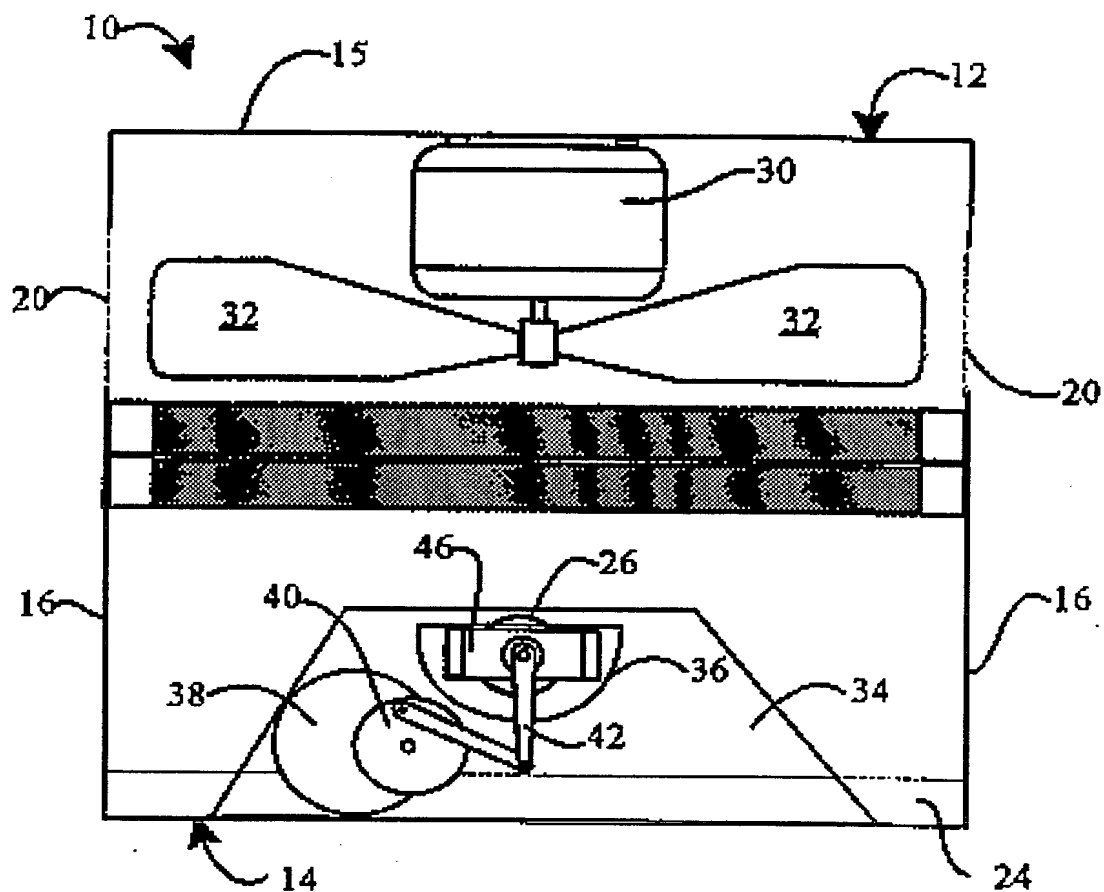
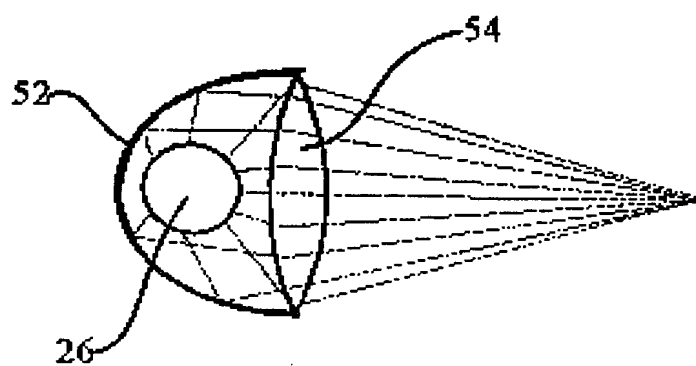


FIG. 7

THIS PAGE BLANK (USPTO)

FIG. 1FIG. 2

FIG. 3FIG. 6

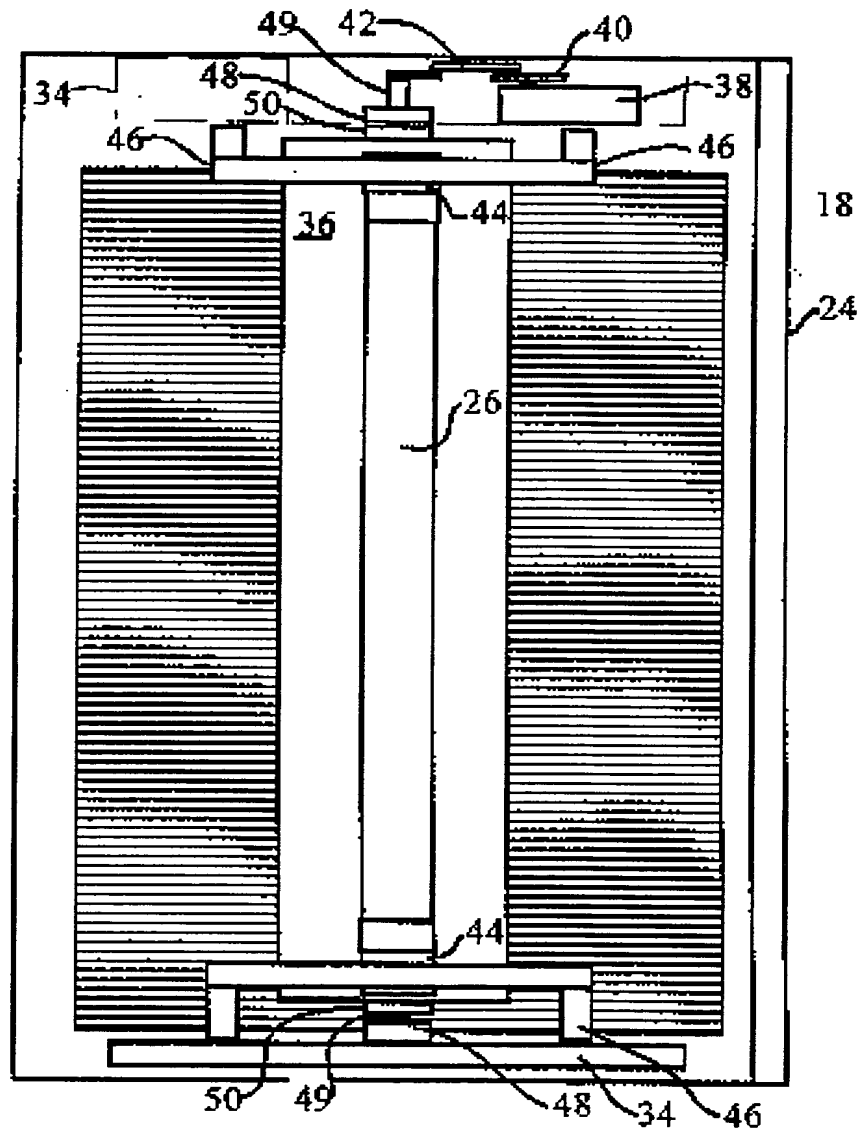


FIG. 4

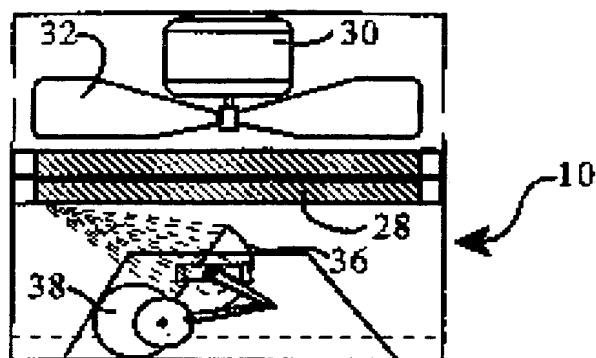


FIG. 5a

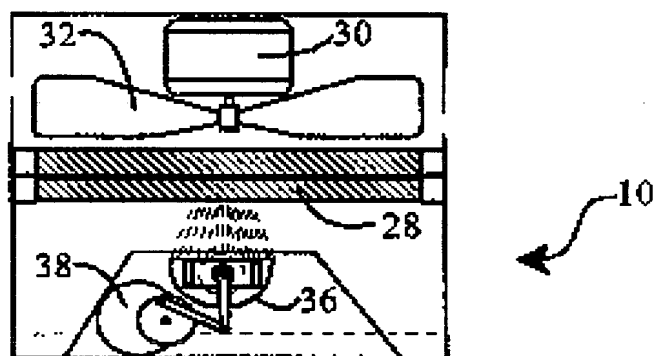


FIG. 5b

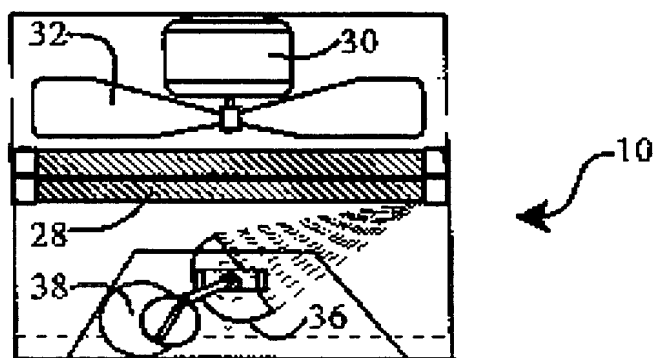


FIG. 5c

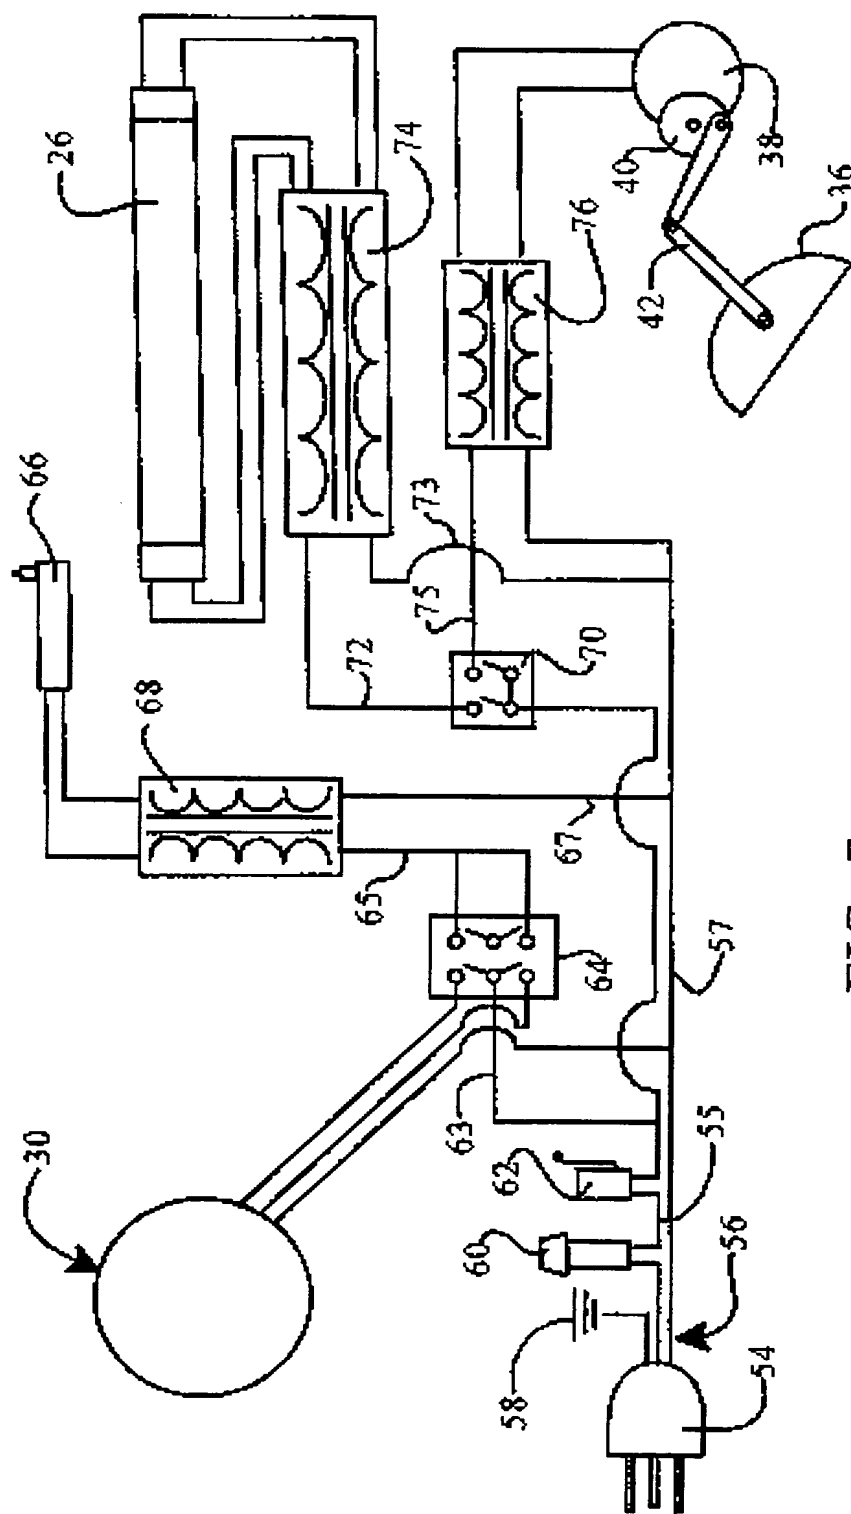


FIG. 7

THIS PAGE BLANK (USPTO)


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61L 9/16, 9/20		A3	(11) International Publication Number: WO 98/47545
			(43) International Publication Date: 29 October 1998 (29.10.98)
(21) International Application Number: PCT/CA98/00369		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 17 April 1998 (17.04.98)			
(30) Priority Data: 08/841,900 17 April 1997 (17.04.97) US			
(71) Applicant: ENGINEERING DYNAMICS LTD. [CA/CA]; R.R. #1, 137 Young Drive, Carleton Place, Ontario K7C 3P1 (CA).			
(72) Inventor: SUMMERS, George, Robert; P.O. Box 1174, Station Main, Carleton Place, Ontario K7C 4L1 (CA).		Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(74) Agents: WOOD, Max, R. et al.; Swabey Ogilvy Renault, Suite 1600, 1981 McGill College Avenue, Montreal, Quebec H3A 2Y3 (CA).		(88) Date of publication of the international search report: 25 February 1999 (25.02.99)	

(54) Title: PORTABLE GERMICIDAL AIR FILTER

(57) Abstract

A lightweight portable germicidal air filter (10) for home and personal use is described. The air filter (10) includes a cabinet (12) which houses an electrostatic air filter (28), an ultraviolet lamp (26) and a parabolic reflector (36), or a convex lens (54) for focusing the ultraviolet radiation emitted by the lamp on an upstream side of the air filter. The reflector or the lens are constantly oscillated to systematically sweep the upstream side of the filter with germicidal levels of radiation. A fan (30, 32) located adjacent the downstream side of the filter draws air through the filter and impels it out through areas for air exhaust (20) in the side walls (16) of the cabinet. The advantage is a simple, lightweight germicidal air filter with few moving parts which is inexpensive to manufacture.

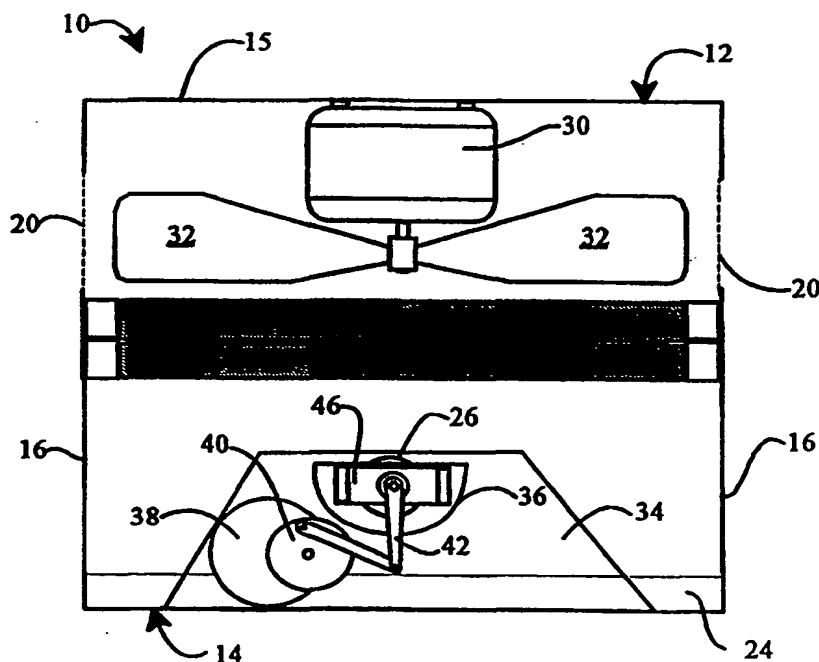

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/00369

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 A61L9/16 A61L9/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 6 A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 330 722 A (PICK WILLIAM E ET AL) 19 July 1994 cited in the application see page 3, line 21 - page 4, line 30 see claims 1-4,8-12,17	1-3,5-8, 10-13
A	DE 73 14 612 U (ORIGINAL HANAU QUARZLAMPEN GMBH) 9 August 1973 see claims 1,5	1-3, 10-13

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

28 December 1998

Date of mailing of the international search report

08/01/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Heck, G

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/CA 98/00369

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5330722 A	19-07-1994	AT 147639 T	15-02-1997
		AU 673539 B	14-11-1996
		AU 4812593 A	12-04-1994
		CA 2106743 A	25-03-1994
		WO 9406482 A	31-03-1994
		CN 1088845 A,B	06-07-1994
		DE 69307522 D	27-02-1997
		DE 69307522 T	11-09-1997
		DK 662846 T	21-07-1997
		EP 0662846 A	19-07-1995
		ES 2099472 T	16-05-1997
		FI 950828 A	23-03-1995
		GR 3023131 T	30-07-1997
		IL 107016 A	10-06-1997
		JP 8501464 T	20-02-1996
		NO 951113 A	23-03-1995
		NZ 255977 A	26-11-1996
DE 7314612 U		NONE	